


*Rely on us.*SM

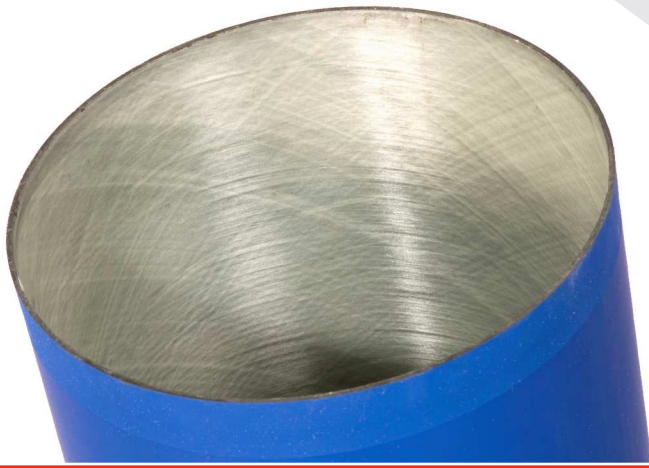

dayGraphica® t3000

For higher standards of printability and reliability

Designed for Goss Sunday presses

Product Features

- The development of the dayGraphica® t3000 seamless printing sleeve helped support the revolution in the design of high-speed rotary web presses. Since then, our uncompromising commitment to improved performance has made today's dayGraphica® t3000 sleeve the worldwide sales leader!
- Extra care is taken to assure that all dayGraphica® t3000 sleeves arrive in your printing plant ready to run. Each one is hand packed in specially designed cartons which protect the sleeve by suspending it in air. While dayGraphica® t3000 sleeves are tough on press, they deserve gentle handling during unpacking and installation.
- The dayGraphica® difference means every t3000 sleeve is backed by the largest and most technically qualified support team in the business. We always work harder to help make your press operators look good on paper!
- This technology is now available for Goss press designs and will allow printers using these machines to benefit from years of technical expertise in this exciting area.

Advantages of dayGraphica® t3000

- Durable, stabilised carcass.
- Excellent smash recovery and rebound characteristics.

dayGraphica® t3000

Features	Benefits
<ul style="list-style-type: none"> Ground seamless surface layer. 	<ul style="list-style-type: none"> dayGraphica® t3000's unique surface finish ensures consistent gauge and uniform web feed for top quality printing.
<ul style="list-style-type: none"> Unique seamless carcass construction. 	<ul style="list-style-type: none"> The durable combination of fibre and compressible layer technologies ensures long life and excellent stability on press. Superb smash recovery for longer life - less downtime, more production.
<ul style="list-style-type: none"> Solvent resistant rubber surface compound. 	<ul style="list-style-type: none"> Proven technology for heatset-web applications.

Colour	Dark Blue
Face compound	Nitrile Butadiene Synthetic Rubber designed for optimum transfer and dot fidelity.
Face treatment	Precision ground seamless surface finish.
Image reinforcing layer	Synthetic fibre cord
Compressible layer	Carbon reinforced Nitrile Butadiene Synthetic rubber designed for optimum rebound and smash resistance.
Composite carrier	Fibreglass reinforced composite.

Press type	Press cutoff range	Max web width range	Thickness	Carrier	Rubber	Nominal load @ 0.13mm indent
Sunday 2000 Sunday 3000	533.4mm - 666.75mm	965mm - 1829mm	2.34mm	0.69mm	1.65mm	7.5 N/mm
Sunday 4000	870mm - 1240mm	980mm - 2060mm	2.46mm - Short Grain 2.67mm - Long Grain	0.81mm - 1.02mm	1.65mm	8.2 N/mm
Sunday 5000	1180mm - 1220mm	2860mm	2.67mm	1.02mm	1.65mm	8.2 N/mm

More products. Streamlined access. Greater results.

Flint Group's Print Media division offers a uniquely powerful combination of products, services and expertise; giving you access to the industry's broadest range of pressroom products.

Inks and Coatings. Pressroom Chemicals. Blankets. Sleeves. Consumables.

Rely on us for consistency, reliability and customer focus. Our aim is to make it easier for you to achieve your business goals. With Flint Group products in your pressroom, you can run your business with confidence and peace of mind.

You are welcome to contact us for further information.

The aim of our technical documents is to inform our customers about general values. However, the transferability of general values known from experience and laboratory results to concrete practical applications depends on a number of factors which are beyond our control. We therefore ask for your understanding that this advice document cannot be used as the basis for claims in law. Furthermore, the correct application for each product has to be checked carefully for suitability.

Product names followed by ® are trademarks registered by Flint Group Incorporated.

Print Media Europe
Balgray Street,
Dundee, DD3 8HN,
Scotland, UK.

T +44 (0)1382 422200
F +44 (0)1382 819051
printmedia.eu@flintgrp.com
www.flintgrp.com