


*Rely on us.*SM

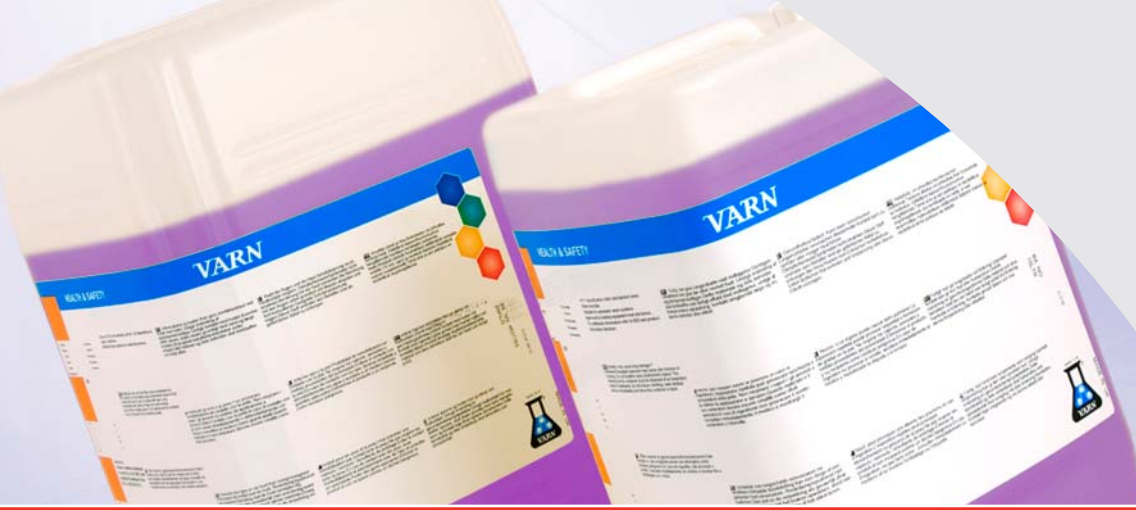

Varn® Fountclean

Non foaming fount systems cleaner to remove impurities from recirculating systems

Specialist cleaner for all printing applications and press types

Product Features

- Varn® Fountclean is a highly concentrated dampening system cleaner.
- Varn® Fountclean contains an active dispersant which quickly penetrates and disperses all debris.
- Varn® Fountclean's strength eliminates the build-up of scale in the fountain system and its high concentration ensures that it is economical in use.
- Varn® Fountclean's low alkalinity value reduces the amount of flushing required.
- If used regularly, Varn® Fountclean will lead to reduced fount maintenance time while maintaining print quality.

Advantages of Varn® Fountclean

- Non foaming.
- Highly effective cleaner.
- Highly concentrated.
- Economical.
- Contains active dispersant.



FlintGroup

Varn® Fountclean

Features	Advantages	Benefits
<ul style="list-style-type: none">• Highly concentrated.	<ul style="list-style-type: none">• Economical in use.	<ul style="list-style-type: none">• Increased profits.
<ul style="list-style-type: none">• Highly effective cleaner.	<ul style="list-style-type: none">• Reduced blockages in pipework.	<ul style="list-style-type: none">• Less down-time and more productivity.
<ul style="list-style-type: none">• Non-foaming.	<ul style="list-style-type: none">• Maintains print quality.	<ul style="list-style-type: none">• More saleable copy.
<ul style="list-style-type: none">• Removes debris.	<ul style="list-style-type: none">• Reduced maintenance during production time.	<ul style="list-style-type: none">• Constant print quality.
<ul style="list-style-type: none">• Contains active dispersant.	<ul style="list-style-type: none">• Quickly penetrates dirt and pipescale.	<ul style="list-style-type: none">• Improved cleaning action with reduced downtime.

Product code

KT10-5FCG-#### (final 4 digits relate to pack size).

Pack sizes

10 litres (01F9), 20 litres (01H5) and 200 litres (01N1).

Application

Highly contaminated damp systems or when changing fount solution systems:

- Sheetfed & small Heatset presses: Dilute 1 part Varn® Fountclean with 3 parts water. Flush for a minimum of 60 minutes and then rinse system twice with clean water and fount solution to re-establish the correct pH value for printing.
- Large Heatset & Newspaper presses: Dilute 1 part Varn® Fountclean with 3 parts water. Flush for a minimum of 2 hours and then rinse system twice with clean water and fount solution to re-establish the correct pH value for printing.

General weekly fountain maintenance:

- Sheetfed & small Heatset presses: Dilute 1 part Varn® Fountclean with 20 parts water. Flush for a minimum of 60 minutes and then rinse system once with clean water and fount solution to re-establish the correct pH value for printing.
- Large Heatset & Newspaper presses: Dilute 1 part Varn® Fountclean with 20 parts water. Flush for a minimum of 2 hours and then rinse system once with clean water and fount solution to re-establish the correct pH value for printing.

Follow relevant Good Manufacturing Practice (GMP) guidelines if used for the production of food packaging.

More products. Streamlined access. Greater results.

Flint Group's Print Media division offers a uniquely powerful combination of products, services and expertise; giving you access to the industry's broadest range of pressroom products.

Inks and Coatings. Pressroom Chemicals. Blankets. Sleeves. Consumables.

Rely on us for consistency, reliability and customer focus. Our aim is to make it easier for you to achieve your business goals. With Flint Group products in your pressroom, you can run your business with confidence and peace of mind.

You are welcome to contact us for further information.

Print Media Europe
Varn House, Brinell Drive,
Northbank Industrial Park, Irlam,
Greater Manchester, M44 5BL, UK.

T +44 (0)161 775 5412
F +44 (0)161 775 5415
printmedia.eu@flintgrp.com
www.flintgrp.com

The aim of our technical documents is to inform and advise our customers. The information provided herein is correct to the best of Flint Group's knowledge. No liability for any errors, facts or opinions is accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.

Product names followed by ® are trademarks registered by Flint Group (represented by Flint Group US LLC or Flint Group Germany GmbH)